



INGLESE 65th

since 1956

www.inglesesrl.com

INGLESE W67

Drawers type processor

for water washable photopolymer plates

max plate size mm. 670 x 870



- A Overturnable plate holder table with semi-permanent adhesive rubber and stainless steel washout tank. Adhesive water heaters installed under the tank.
- B PLC with touch screen
- C Main exposure drawer with diffusion sheet and suction pump
- D 3 dryers
- E Vacuum-meter
- F Additional drawer for second exposure UVA and/or UVC available upon request - OPTIONAL
- G Water filtrating and recycling system available upon request - OPTIONAL




INGLESE 65th

since 1956

www.inglesesrl.com

INGLESE W67

- PLC with touch screen controlling each working step simultaneously: main-exposure time, washout time, second-exposure time, washout temperature, dryers temperature, dryers time (one for each drawer).
- Vacuum drawer with diffusion sheet.
- High number of exposure lamps to grant a perfectly homogeneous covering of the different sizes.
- Water washout system, inside a stainless steel tank, ensured by the orbital motion of a overturnable plate holder.
- 3 dryers for treating different plates at the same time.
- Main switch, PLC touch screen, exposure lamps warning light and vacuum meter on the front side.

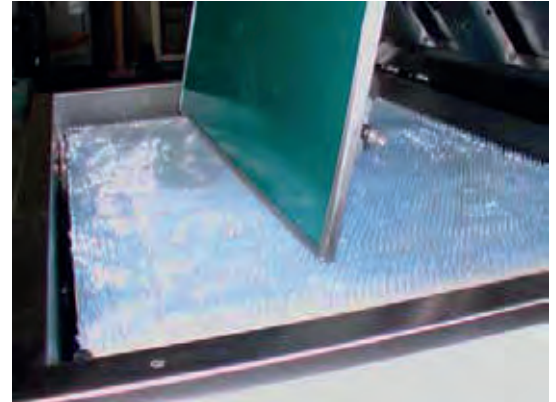

G



An external recycle device for washout water is available at request. It allows, thanks to a replaceable filter bag, to ensure most of the polymer washed from plates remains in the filter as well as black mask if digital plates are processed.

It allows to use the same water for the process for more plates and, so, to save money both about water consumption and water disposal.

Over dimension and weight:

width	cm. 145
depth	cm. 126
height	cm. 119 (upper lid closed)
weight (without water)	kg. 435 - 500 (basing on configuration)

power:

380 V 50/60 Hz 3ph+n+t - 13.9 Ampere - 8.7 kW