


INGLESE RS 2/3 ROTARY SCREENS

Pneumatic cleaning machine for rotary screens and parts - ink fountains: 2 rotary screens and parts or 3 rotary screens

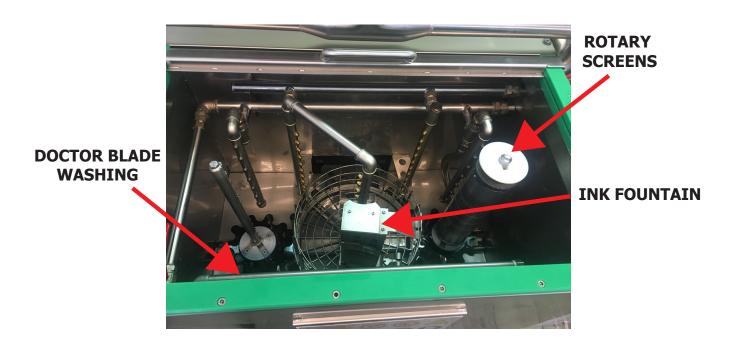

COMPLIANT TO DIRECTIVES 2006/42/CE - 2014/34/UE (ATEX)

- Fully pneumatic operation.
- Manufactured in AISI 304 stainless steel.
- PTFE double membrane pneumatic pump ATEX 2G.
- In and out filtering.
- Pneumatic programmable logic: timer for washing, pause, suction.
- Lid pneumatic block.
- Perimeter suction frame with pneumatic guillotine valve for connection to suction system.
- Safety pneumatic microswitch.
- N. 2 planetary for rotary screens and N.1 planetary for parts (customizable) or N. 3 planetary for rotary screens (customizable), whose rotation system guarantees a total coverage to surfaces to wash.
- N. 6 vertical bars complete with stainless steel nozzles: 2 for internal and 4 for external.
- N. 1 lower horizontal bar complete with stainless steel nozzle.
- N. 1 superior horizontal bar complete with stainless steel nozzle.
- Min-Max level probe.